



外球面轴承


insert bearing



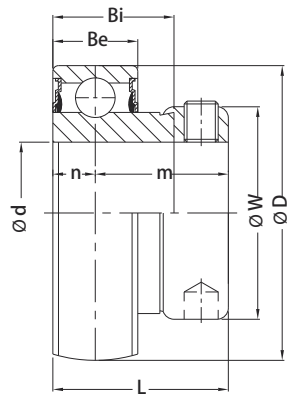

R3 SEAL

F SEAL



TWO TOUCH SEAL

RA200

轴径 (d)

(min.) | (mm)

轴承型号

外形尺寸 (mm)

D

L

Bi

Be

n

m

W

止动螺钉规格
(mm)
(UNF)

载荷 (Kgf)

Cr

Cor

重量

1/2	12	RA 201												
	15	RA 201-8	40,0	28,6	19,0	12,0	6,5	22,1	33,3	M6x1,0	970	490	0,15	
5/8	17	RA 202												
		RA 202-10												
		RA 203												
3/4	20	RA 204-12	47,0	31,0	21,4	14,0	7,5	23,5	33,3	M6x1,0	1310	680	0,15	
		RA 204												
7/8	25	RA 205-14	52,0	31,0	21,4	15,0	7,5	23,5	38,1	M6x1,0	1430	800	0,20	
1		RA 205												
		RA 205-16												
1-1/8	30	RA 206-18	62,0	35,7	23,8	18,0	9,0	26,7	44,5	M6x1,0	2000	1140	0,30	
1-3/16		RA 206												
1-1/4		RA 206-19												
		RA 206-20												
1-1/4	35	RA 207-20	72,0	38,9	25,4	19,0	9,5	29,4	55,6	M8x1,0	2640	1550	0,55	
1-3/8		RA 207-22												
1-7/16		RA 207												
		RA 207-23												
1-1/2	40	RA 208-24	80,0	43,7	30,2	21,0	11,0	32,7	60,3	M8x1,0	2990	1860	0,60	
		RA 208												
1-5/8	45	RA 209-26	85,0	43,7	30,2	22,0	11,5	32,7	63,5	M8x1,0	3350	2120	0,60	
1-11/16		RA 209-27												
1-3/4		RA 209-28												
		RA 209												
1-15/16	50	RA 210-31	90,0	43,7	30,2	22,0	11,0	32,7	69,9	M8x1,0	3600	2370	0,60	
2		RA 210												
		RA 210-32												
	55	RA 211	100,0	48,3	32,6	24,0	11,9	36,4	76,2	M10x1,25	4400	2980	0,65	
	60	RA 212	110,0	53,1	37,1	24,0	11,9	41,2	84,1	M10x1,25	5350	3350	0,65	